

# VITREK

www.Vitrek.com

**JZ17** 傑立科技  
WWW.JZ17.COM.TW  
TEL : 04-23552289 FAX : 04-23552232

## High Accuracy, High Precision Power Analyzers PA920/PA910

Vitrek's Most Powerful, Accurate & Flexible Electrical Power Analyzer, Providing Ultra-High Accuracy (0.024%), Faster Sampling Rates, Bandwidth Performance and Greater Harmonic Frequencies, Yet Still Easy-To-Use and Affordable.

### Quality and Reliability

Vitrek, founded in 1990, is the premier source of precision power testing and measuring equipment for industrial and consumer product development and manufacturing. Vitrek's sophisticated technology provides companies the edge in design verification and product manufacturability.

Specifications are subject to change without notice. Please visit [www.vitrek.com](http://www.vitrek.com) for full specifications and ordering information.

**30**  
Years Industry  
EXPERTISE



**Industry's Easiest-To-Use Power Analyzer** - Vitrek's PA920/PA910 Series power analyzers are the industry's easiest-to-use power analyzer. Equipped with a full color touchscreen, the PA9xx enables users to quickly and easily setup configurations, custom screens and interface commands.

**Maximize Flexibility** - The PA920 power analyzer offers expanded power analysis capabilities. The PA920 offers 0.024% base power accuracy for the UT channel cards. Vitrek channel cards are user friendly, store their calibration data and can be quickly swapped in the field to meet your latest testing requirements. In addition, the PA920/PA910 provides easy channel selection for the user while offering 100 full precision readings per second and measurement bandwidths sufficient to handle 5 MHz signals.

**Maximum Results** - For tackling tough power factor, low phase angle and high crest factor loads, the PA9xx power analyzers are unbeatable. Offering full performance for crest factors as high as 100:1, the PA9xx series provides superior power measurement capabilities for the toughest power measurement applications. The PA920 also offers improved voltage and current self-heating adders over those of the PA900 series.

**Maximum Performance in a Variety of Applications** - Design engineers are under constant pressure to increase efficiency and reduce excess product power consumption down to the last mW. Challenging programs like LED and HID lighting, solar panel energy output, efficiency testing on inverters and PWM motor drive systems on electric vehicles—all require fast, precise, reliable power measurement. The unequalled performance of the Vitrek PA920 gives you the competitive advantage—the ability to accurately capture the power data you need in a flexible, accurate, easy-to-use power analyzer.

**Modular Design=Maximum Flexibility** - The PA920 Series Power Analyzers are available in both pre-configured models or can be purchased in a custom configuration to provide the performance you need at a price that meets your budget.

#### PA920 Channel Cards for use with PA920 Mainframe (0.024% Accuracy UT Card)



- UT Channel Card - Ultra-Precision Dual Shunt (1, 32A) Channel Card
- UX Channel Card - Ultra-Precision External Current Transducer Input Channel Card
- BT Channel Card - High Bandwidth Dual Shunt (1, 32A) Channel Card
- BX Channel Card - High Bandwidth External Current Transducer Channel Card
- KT Channel Card - Kilovolt (1.6kVrms Continuous) Dual Shunt (1, 32A) Channel Card
- KX Channel Card - Kilovolt (1.6kVrms Continuous) External Current Transducer Input Channel Card
- MT Channel Card - Motor Transducer Channel Card (Slot 4 only)

#### PA 910 Channel Cards for use with PA910 Mainframe (0.045% Accuracy)

- VT Channel Card - High-Precision Dual Shunt (1, 30A) Channel Card
- VX Channel Card - High-Precision External Current Transducer Input Channel Card
- MT Channel Card - Motor Transducer Channel Card (Slot 4 only)

# PA920/910

## High Accuracy, High Precision Power Analyzers

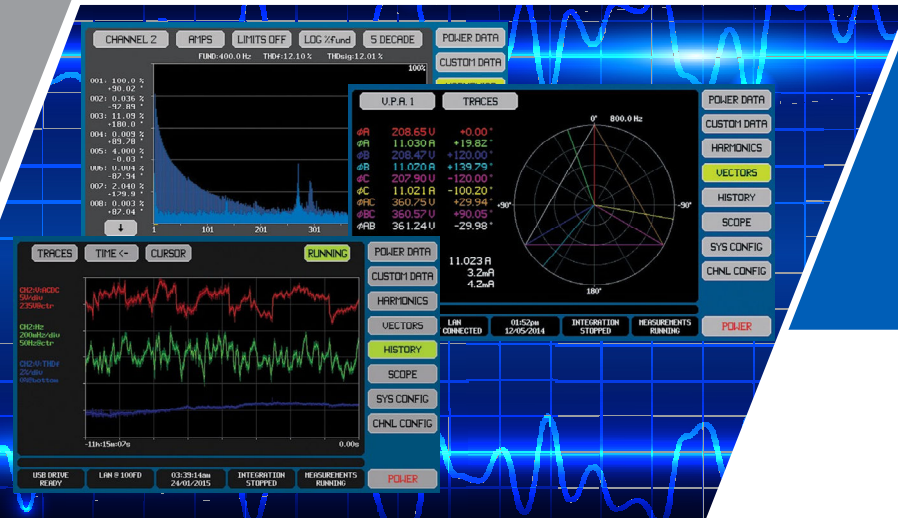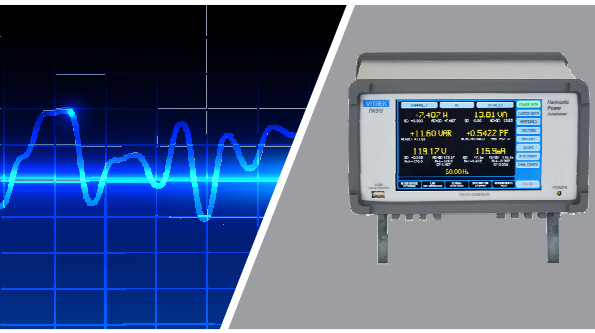


# Test Like You MEAN IT

### CONDENSED FEATURES & BENEFITS

- > Easy-to-use color touchscreen for quick setup, measurement configuration, channel selection and use.
- > High Accuracy and frequency range 0.024% Power Accuracy, PA920 with UT card.
- > Supports a variety of compliance and environmental performance standards including:
  - EN60034-2-1:2014 (motor drives)
  - EN50564:2011 (standby power)
  - EN61000-3-2 and 3-12 and 4-7 (harmonics emissions)
  - RTCADO-160/E/F/G (avionics)
  - Boeing 787B3-0147
  - Airbus ABD0100.1.8 (A380) and ABD0100.1.8.1 (A350)


- > Harmonics Screen displays up to 500 harmonics, even at aviation power frequencies. The chart can be set to show linear, relative linear, logarithmic or relative logarithmic amplitudes.



- > Power Data Screen is available with one touch to display V, A, W, VA, VAR and PF for any selected channel or group of channels. In addition, peak readings, phase, CF and other parameters are also available.



- > Scope Screen offers waveform acquisition and analysis similar to a digital scope. Up to six signals can be displayed each having user selectable scaling, offset and color.



- > Cycle View represents a single cycle of the voltage and/or current periodic waveforms. User selectable amplitude and scaling provides almost unlimited detail and visibility.



- > History Screen (bottom screen shown above) is a maintained continuous historical record of all non-harmonic measurement results and selected harmonics. Up to four user selectable parameters can be graphically displayed using the history screen.

- > Additional Screens are available, visit [www.vitrek.com](http://www.vitrek.com) to view additional specifications and display screens.

For complete specifications visit [www.vitrek.com](http://www.vitrek.com).

### PA920 ORDERING INFORMATION

PART#	DESCRIPTION
PA920	Ultra-Precision Power Analyzer Mainframe 4-channel capacity 0.024% Accuracy (UT Card)
UT	UT Channel Card - Dual Shunt (1,30A)
UX	UX Channel Card - External Current Transducer Input Channel Card
BT	BT Channel Card - High Bandwidth Dual Shunt (1,30A)
BX	BX Channel Card - High Bandwidth External Current Transducer Input Channel Card
KT	KT Channel Card - Kilovolt (1.6kVrms Continuous) Dual Shunt (1,30A)
KX	KX Channel Card - Kilovolt (1.6Vrms Continuous) External Current Transformer Input Channel Card
MT	Motor Transducer Channel Card (Slot 4 only)

\* For pre-configured models visit us online at [www.vitrek.com](http://www.vitrek.com)

### PA910 ORDERING INFORMATION

PART#	DESCRIPTION
PA910	Ultra-Precision Power Analyzer Mainframe 4-channel capacity 0.045% Accuracy
VT	VT Channel Card - Dual Shunt (1,30A)
VX	VX Channel Card - External Current Transducer Input Channel Card
MT	MT Channel Card - Motor Transducer Channel Card (slot 4 only)




Vitrek  
12169 Kirkham Road  
Poway, CA 92164  
(858) 689-2755  
info@vitrek.com  
www.vitrek.com  
REV 10/19



Specifications are subject to change without notice.  
Please visit [www.vitrek.com](http://www.vitrek.com) for full specifications.

Please visit [www.vitrek.com](http://www.vitrek.com) for ordering information.



Accuracy specifications are valid for a period of two years after calibration in normal use. Consult operating manual for full specifications.

### Voltage Input Capability and Characteristics

Specification	V Channel Type	K Channel Type	B Channel Type	U Channel Type
Voltage Input Burden	1.201MΩ± 3kΩ	2MΩ± 5kΩ	801.5kΩ± 2kΩ	1.201MΩ± 3kΩ
Maximum Measurable Voltage (pk, dc or rms)	2kV	3.3kV	1350V	2kV
Max. Specified Continuous Voltage (within maximum measurable peak)	PA910	1000V <sub>RMS</sub>	Not Available	Not Available
	PA920	Not Available	1625V <sub>RMS</sub>	1250V <sub>RMS</sub>
No Damage Voltage	<1ms	<3kV <sub>RMS</sub> and V <sub>PK</sub>	<4kV <sub>RMS</sub> and V <sub>PK</sub>	<3kV <sub>RMS</sub> and V <sub>PK</sub>
	<100ms	<2kV <sub>RMS</sub>	<2.5kV <sub>RMS</sub>	<2kV <sub>RMS</sub>
	<5s	<1.5kV <sub>RMS</sub>	<2kV <sub>RMS</sub>	<1.5kV <sub>RMS</sub>
Mains Safety Rating	1000V/CATII,600V/CATIII,300V/CATIV		600V/CAT II or III 300V/CAT IV	1000V/CAT II, 600V/CAT III, 300V/CAT IV
Transient Isolation Voltage (to ground)	>4.5kVpk			
Voltage Accuracy (DC, 20Hz-1kHz) ± Self-Heating Adder	PA910	±0.03%±0.02% per kV²	Not Available	Not Available
	PA920	Not Available	±0.03%±0.006% per kV²	±0.03%±0.015% per kV²
DC Voltage Floor	±0.9mV	±1.35mV	±1.8mV	±0.9mV
AC Voltage Floor (10kHz BW)	450μV + $\frac{\mu}{\text{---}}$	750μV + $\frac{\mu}{\text{---}}$	300μV + $\frac{\mu}{\text{---}}$	450μV + $\frac{\mu}{\text{---}}$
3dB Voltage Bandwidth (typical)	2MHz	850kHz	4.5MHz	2MHz
Maximum Harmonic Frequency	<590kHz and <500 harmonics			
Effective Sampling	24bits @ 384MSPS			
Physical Sampling	6bits+18bits @ >1.2MSPS combined			

### Current Input Capability and Characteristics

Specification	T Current Option		X Current Option	
	HI Range	LO Range	HI Range	LO Range
Current Input Burden	8mΩnominal	505mΩnominal	153kΩ± 0.5kΩ	100.5kΩ± 0.3kΩ
Maximum Measurable Current (pk, dc or rms)	150A	1.5A	15V	0.6V
Specified Continuous Current (within measurable peak)	PA910	30A <sub>RMS</sub>	12V <sub>RMS</sub>	0.5V <sub>RMS</sub>
	PA920	32A <sub>RMS</sub>		
No Damage Current	<8ms	<200A <sub>RMS</sub> and <300A <sub>PK</sub>	<1kV <sub>RMS</sub> and V <sub>PK</sub> (fuse protected above 18V)	
	<40ms	<75A <sub>RMS</sub>		
	<1s	<50A <sub>RMS</sub>		
Mains Safety Rating (Isolation)	1000V/CAT II, 600V/CAT III, 300V/CAT IV			
Transient Isolation Voltage (to ground)	>4.5kVpk			
Current Accuracy (DC, 20Hz-1kHz) ± Self-Heating Adder	UT or UX	±0.018%±0.000025% per A²	±0.018%	
	Other	±0.03%±0.00005% per A²	±0.03%	
DC Current Floor	BT or BX	±438μA	±126μV	±6.15μV
	Other	±188μA	±46μV	±5.15μV
AC Current Floor (10kHz BW)	38μA + $\frac{\mu}{\text{---}}$	0.25μA + $\frac{\mu}{\text{---}}$	6μV + $\frac{\mu}{\text{---}}$	0.15μV + $\frac{\mu}{\text{---}}$
3dB Current Bandwidth (typical)	BT or BX	5MHz	2.5MHz	
Other	2MHz			
Maximum Harmonic Frequency	<590kHz and <500 harmonics			
Effective Sampling	24bits @ 384MSPS			
Physical Sampling	6bits+18bits @ >1.2MSPS combined			

### Power (W) Input Capability and Characteristics

Specification	V Channel Type	K Channel Type	B Channel Type	U Channel Type
Power Accuracy (DC, 20Hz-1kHz)	PA910 ±0.045%	Not Available	Not Available	Not Available
	PA920	±0.045%	±0.045%	±0.024%
Power Floor Adder	±0.000025% * ((maximum measurable V*Ardg) + (maximum measurable A*Vrdg)).			
Self-Heating Adder	± (V and A self-heating)			
DC Power Floor (Apply to DC Only)	(Vrdg*DC current floor) ± (Ardg*DC voltage floor) ± (DC voltage floor*DC current floor)			
Phase Floor	±0.005° per kHz		±0.003° per kHz	±0.005° per kHz

Note: Specifications subject to change.

#### Dimensional:

Nominal Dimensions 137mmH x 248mmW x 284mmD (5.4" x 9.75" x 11.2") with feet not extended

#### Nominal Weight

3.2kg (7lb) net, 5kg (11lb) shipping

#### Environmental

Storage Environment

-20 to 75C (-4 to 167F)(non-condensing)

Operating Environment

0 to 40C (32 to 104F), <85%

RH (non-condensing), Pollution Degree 2 Operating Altitude

0 to 2000m (6560ft) ASL

#### Power Supply

Line Power

Installation Category II; 85-264Vrms, 45 to 65Hz, 40VA max.

Internally fused with a non-user

#### serviceable fuse

LAN (Ethernet), Serial (RS232), USB (Client) and USB (Host – Front Panel) for mass data storage

7" 800x480px 18bpp color LCD with resistive touch panel.

#### Interface

Display

Specifications are subject to change without notice. Please visit [www.vitrek.com](http://www.vitrek.com) for full specifications and ordering information.

**JZ17** 傑立科技  
WWW.JZ17.COM.TW  
TEL : 04-23552289 FAX : 04-23552232

Vitrek

12169 Kirkham Road  
Poway, CA 92164  
(858) 689-2755  
info@vitrek.com  
www.vitrek.com

